

DUKERS D28F-GS1

Brand: DUKERS

Product Code: D28F-GS1

Availability: In Stock

Weight: 286.00lb

Dimensions: 27.50in x 32.63in x 80.38in

Price: \$2,675.00

Short Description

28" - 1 - Door Bottom Mount Glass Door Commerical Reach-in Freezer

Description

The **Dukers D28F-GS1** reach-in commercial freezer features a tempered glass door and 4 easy swivel casters. A single door is accented with high-quality brushed stainless steel for both the interior and exterior to fit a variety of decors. Recessed door handles allow for clean styling and better ergonomics. The heavy-duty compressor is bottom mounted for excellent efficiency and better cooling. Digital controls fine-tune the desired interior temperature. Self-closing doors free up your hands for added convenience and ease of use. Auto-defrosting provides lower energy costs and colder temperatures. Four shelves can be adjusted or removed for flexibility and maintenance. Easily move and position with four swivel casters.

Technical Specifications

- reach-in freezer
- one-section
- tempered glass door
- 17.7 cu. ft. capacity
- temperature range from 0 to -8°F
- bottom mounted self-contained refrigeration and compressor
- (1) hinged glass door, tempered glass, UV blocking
- (4) epoxy coated wire shelves
- digital controls with LED display
- auto defrost

- LED interior lighting
- stainless steel interior, stainless steel sides
- (4) adjustable front locking casters
- R290 natural refrigerant
- dimensions (W x D x H): 27 1/2" x 32 5/8" x 80 3/8"
- 1/2 HP, 115V/60Hz, 5.3 Amps, 550 watts, 9 ft. power cord, NEMA 5-15P, NSF, cETLus, ETL-Listed, ETL Sanitation
- 3 Year Parts & Labor Warranty, 5 Year Compressor Warranty

Specifications



REACH IN FREEZER

D28F-GS1

Bottom Mounted / Glass Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency

115V/60Hz

Refrigerant

R290

Type of Defrost

Automatic

Interior Material

Stainless Steel

Exterior Material

Stainless Steel

Temperature Range °F

0 ~ -8°F

Compressor Power (HP)

3/4

Nema Config.

NEMA5-15P



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperatures in the cabinet range from 0 to -8° degrees Fahrenheit



Hinged glass doors, tempered glass, UV blocking.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Epoxy coated wire shelves.



Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.



High quality coated stainless adjustable shelves prevent peel and rust.



Lifetime warranty on hinges.



Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey



1-800-931-8628



info@dukersusa.com


www.DukersUSA.com

x000D


DETAILS & SPECIFICATIONS

D28F-GS1

Front View

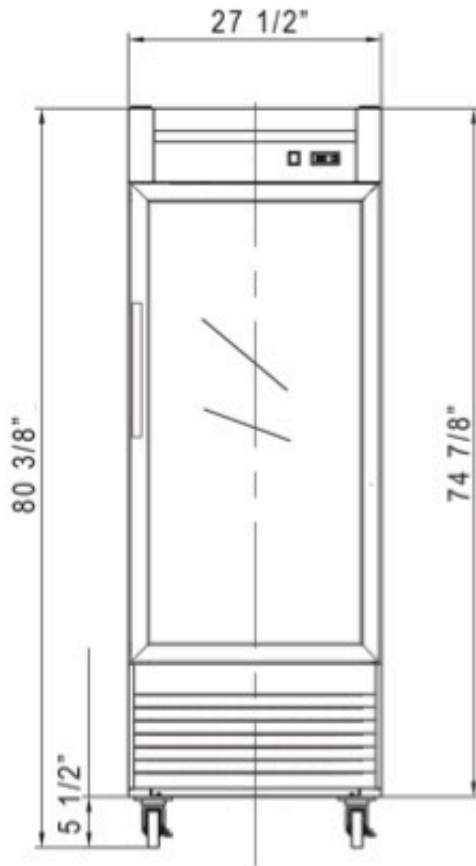

Side View

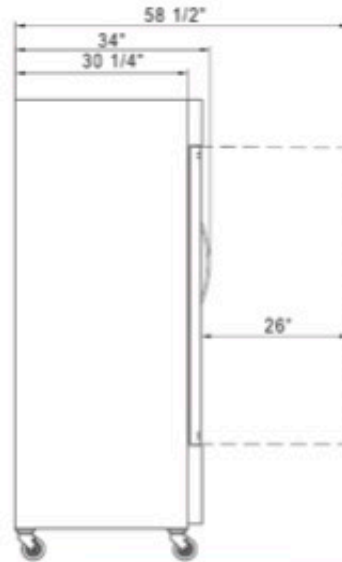

MODEL D28F-GS1

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	550W
Total Current	5.3A
Energy Consumption	8.1kW.h/24h
Total Capacity	17.79 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/4.41oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D28F-GS1	27 1/2 x 34 x 80 3/8	29 1/2 x 35 x 82 3/8	308 lbs	4	39



AutoQuotes



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com

Warranty

3 Years Parts and Labor;

x000D

5 Years Compressor

x000D

[Click Here for the Warranty](#)

x000D

Shipping / Pick up

Free Shipping On Certain Orders! Call Now for a Quote!

Warning CA Residents

WARNING: This product can expose you to chemicals including Nickel and Lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.

Product Gallery